

Nonmodal amplification of disturbances as a route to elasticity-induced turbulence

Mihailo R. Jovanović* and Satish Kumar†

University of Minnesota, Minneapolis, MN 55455, USA

(Dated: October 16, 2008)

Abstract

A new mechanism for nonmodal amplification of stochastic disturbances in elasticity-dominated channel flows of Oldroyd-B fluids is reported. For streamwise-constant flows with high elasticity numbers μ and finite Reynolds numbers Re , we establish the $O(\mu Re^3)$ scaling of the steady-state variance amplification. This demonstrates that large velocity variances can be sustained in weakly inertial/strongly elastic stochastically driven channel flows. The mechanism examined here provides a possible route for a bypass transition to ‘elastic turbulence’ and might be exploited to enhance mixing in microfluidic devices.

PACS numbers: 47.20.Gv, 47.20.Pc, 47.27.Cn

Fluid motion is usually classified as either laminar or turbulent; flows that are smooth and ordered (laminar) may become complex and disordered (turbulent) as the flow strength increases. This process is commonly referred to as transition (to turbulence). A laminar flow is characterized by smaller viscous shear stresses and velocity gradients than a turbulent flow, leading to a lower skin-friction drag force on a vehicle moving through a fluid in the laminar regime. On the other hand, a turbulent flow provides excellent mixing which is, for example, required in chemical reactors, heat exchangers, and combustion engines.

The classical approach to transition examines the linearized equations for exponentially growing normal modes. The existence of these unstable modes implies exponential growth of infinitesimal perturbations to the laminar flow, and the corresponding eigenfunctions identify flow patterns that are expected to dominate early stages of transition. This approach agrees with experiments in many relevant flows (e.g., those driven by thermal and centrifugal forces [1]) but it comes up short in matching experimental observations in wall-bounded shear flows (flows in channels, pipes, and boundary layers). Failure of classical hydrodynamic stability analysis is attributed to the nonnormal nature of the linearized equations which may manifest itself by transient growth of perturbations [2], protrusion of pseudospectra to the unstable regions [1], and large receptivity to ambient disturbances [3, 4]. Even in stable regimes—owing to nonnormality—perturbations that grow transiently before decaying due to viscosity can be configured, irregularities in laboratory design can lead to instability, and background disturbances (such as free-stream turbulence or surface imperfections) can be amplified by orders of magnitude. These conclusions can be reached by performing transient growth, pseudospectra, or variance amplification analyses [5, 6]. All of these methods demonstrate the importance of streamwise-elongated flow patterns of high and low streamwise velocity in transitional wall-bounded shear flows of Newtonian fluids; this is at odds with classical modal stability results, but in agreement with experiments conducted in noisy environments [7].

Transition to turbulence in viscoelastic fluids is important from both fundamental and technological perspectives [8]. The observation that transition can occur even when the effects of fluid elasticity dominate those of fluid inertia—which is a primary cause of transition in Newtonian fluids—is particularly intriguing. Improved understanding of transition mechanisms in viscoelastic fluids has broad applications in physics, ranging from deeper insight into order-disorder transitions in spatially extended nonlinear dynamical systems to

enhanced mixing in microfluidic devices through the addition of polymers [9, 10, 11].

Amplification of stochastic disturbances in channel flows of viscoelastic fluids has recently been investigated using linear systems theory [12]. For the Oldroyd-B constitutive model, computations reported in Ref. [12] demonstrated that streamwise-constant disturbances can be considerably amplified in the weakly inertial/strongly elastic regime. As in Newtonian fluids, this amplification is fundamentally nonmodal in nature: it cannot be described using the standard normal mode decomposition of classical hydrodynamic stability analysis [5, 6]. Rather, it arises due to an energy exchange involving the fluctuations in the streamwise/wall-normal polymer stress and the wall-normal gradient of the streamwise velocity [13].

The key parameters in viscoelastic fluids are: the viscosity ratio, $\beta = \eta_s/(\eta_s + \eta_p)$, where η_s and η_p are the solvent and polymer viscosities; the Reynolds number, $Re = \rho U_o L/(\eta_s + \eta_p)$, which represents the ratio of inertial to viscous forces; and the elasticity number, $\mu = We/Re$, which quantifies the strength of elastic forces relative to inertial forces. Here, $We = \lambda U_o/L$ is the Weissenberg number, λ is the fluid relaxation time, U_o is the largest base flow velocity, L is the channel half-width, and ρ is the fluid density. By modeling ambient disturbances as stochastic forcing to streamwise constant channel flows of Oldroyd-B fluids (with spanwise wavenumber k_z), an explicit scaling of the variance (energy) amplification with the Reynolds number Re was developed in Ref. [13], $E(k_z; Re, \beta, \mu) = f(k_z; \beta, \mu)Re + g(k_z; \beta, \mu)Re^3$, where f and g denote the Re -independent functions. It is worth noting that E quantifies the ensemble-average energy density (associated with the velocity field) of the statistical steady-state [3, 4]. In the same reference, numerical computations were used to conjecture that in flows with $\mu \gg 1$ the steady-state variance scales as

$$E(k_z; Re, \beta, \mu) \approx \hat{f}(k_z; \beta)Re + \hat{g}(k_z; \beta)\mu Re^3.$$

In this work, considering case of high μ , we apply singular perturbation techniques for systems with rapidly varying inputs [14] to establish that the variance indeed depends affinely on μ .

The last expression should be compared to the expression for the variance amplification in Newtonian fluids [15], $E_N(k_z; Re) = f_N(k_z)Re + g_N(k_z)Re^3$. At low Re the k_z -dependence of E_N is governed by $f_N(k_z)$, and at high Re $E_N(k_z) \approx Re^3 g_N(k_z)$ [15]. We note that the k_z -dependence of both $\hat{f}$ and f_N is characterized by viscous dissipation, which clearly indicates that the behavior of Newtonian fluids with low Re is dominated by diffusion. On the other

hand, the g -functions exhibit peaks at $k_z \approx O(1)$; the values of k_z where these peaks take place identify the spanwise length scales of the most energetic response to stochastic forcing in Newtonian fluids with high Re , and in Oldroyd-B fluids with high μRe^3 . Our results thus show that—in viscoelastic fluids—even at arbitrarily low (but non-zero) Reynolds numbers the steady-state level of velocity variance may be dominated by the Re^3 -term owing to the elastic amplification of disturbances. This reveals the subtle interplay between inertial and elastic forces in Oldroyd-B fluids with low Reynolds/high elasticity numbers [9, 10].

We consider incompressible channel flows of Oldroyd-B fluids with $\epsilon = 1/\mu \ll 1$. The equations governing the dynamics (up to first order) of velocity ($\mathbf{v} = [v_1 \ v_2 \ v_3]^T$), pressure (p), and polymer stress tensor ($\boldsymbol{\tau}$) fluctuations around base flow condition ($\bar{\mathbf{v}}, \bar{\boldsymbol{\tau}}$) are brought to a non-dimensional form by scaling length with L , velocity with U_o , polymer stresses with $\eta_p U_o/L$, pressure with $(\eta_s + \eta_p)U_o/L$, and time with λ

$$\begin{aligned} \epsilon \dot{\mathbf{v}} &= -Re(\boldsymbol{\nabla}_{\mathbf{v}} \bar{\mathbf{v}} + \boldsymbol{\nabla}_{\bar{\mathbf{v}}} \mathbf{v}) - \boldsymbol{\nabla} p + (1 - \beta) \boldsymbol{\nabla} \cdot \boldsymbol{\tau} + \beta \boldsymbol{\nabla}^2 \mathbf{v} + \sqrt{\epsilon Re} \mathbf{d}, \quad 0 = \boldsymbol{\nabla} \cdot \mathbf{v}, \\ \dot{\boldsymbol{\tau}} &= \boldsymbol{\nabla} \mathbf{v} + (\boldsymbol{\nabla} \mathbf{v})^T - \boldsymbol{\tau} + \frac{Re}{\epsilon} (-\boldsymbol{\nabla}_{\mathbf{v}} \bar{\boldsymbol{\tau}} - \boldsymbol{\nabla}_{\bar{\boldsymbol{\tau}}} \boldsymbol{\tau} + \boldsymbol{\tau} \cdot \boldsymbol{\nabla} \bar{\mathbf{v}} + \bar{\boldsymbol{\tau}} \cdot \boldsymbol{\nabla} \mathbf{v} + (\bar{\boldsymbol{\tau}} \cdot \boldsymbol{\nabla} \mathbf{v})^T + (\boldsymbol{\tau} \cdot \boldsymbol{\nabla} \bar{\mathbf{v}})^T). \end{aligned}$$

Here, a dot signifies a partial derivative with respect to time t , $\boldsymbol{\nabla}$ is the gradient, $\boldsymbol{\nabla}_{\mathbf{v}} = \mathbf{v} \cdot \boldsymbol{\nabla}$, and v_1 , v_2 , and v_3 are the velocity fluctuations in the streamwise (x), wall-normal (y), and spanwise (z) directions, respectively. If $\tilde{t}$ denotes time normalized by the convective time scale L/U_o , then $t = \tilde{t}/We$.

The linearized momentum equation is driven by the body force fluctuation vector $\mathbf{d} = [d_1 \ d_2 \ d_3]^T$, which is considered to be purely harmonic in the horizontal directions, and stochastic in the wall-normal direction and in time. This spatio-temporal body forcing will in turn yield velocity and polymer stress fluctuations of the same nature. Our goal is to study the steady-state level of variance maintained in $\mathbf{v}$ by assuming that $\mathbf{d}$ is a temporally stationary white Gaussian process with zero mean and unit variance. It is noteworthy that if $\tilde{\mathbf{d}}$ denotes the forcing in the standard non-dimensional momentum equation (with time scale L/U_o), then $\mathbf{d}(t) = \sqrt{We} \tilde{\mathbf{d}}(\tilde{t})$. This body-force scaling is introduced to guarantee the same auto-correlation operators of $\mathbf{d}(t)$ and $\tilde{\mathbf{d}}(\tilde{t})$ [14].

We study the linearized model for streamwise-constant three-dimensional fluctuations, which means that the dynamics evolve in the (y, z) -plane, but flow fluctuations in three spatial directions are considered. This model is analyzed since the largest level of variance

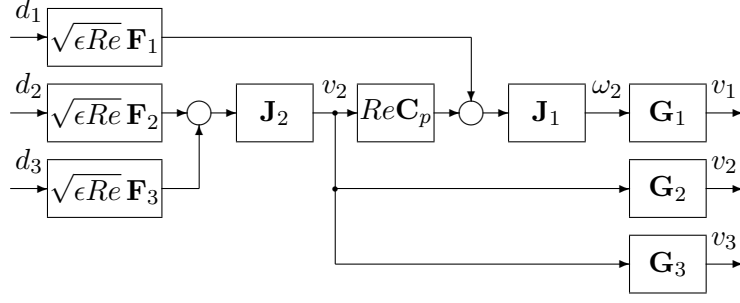


FIG. 1: Block diagram of the linearized streamwise constant model.

in stochastically forced channel flows of viscoelastic fluids is maintained by streamwise-constant fluctuations [12].

The linearized governing equations can be brought to an evolution form by removing the pressure from the equations and by expressing $\mathbf{v}$ in terms of the wall-normal velocity/vorticity (v_2, ω_2) fluctuations [12]. Furthermore, application of the Fourier transform in t and z allows for elimination of the polymer stresses from the evolution model, which results in an equivalent block diagram representation of the linearized system. The block diagram in FIG. 1 provides a systems-level view of the streamwise-constant model. The boxes represent different parts of the system and the circles denote summation of signals. Inputs into each box/circle are represented by lines with arrows directed toward the box/circle, and outputs of each box/circle are represented by lines with arrows leading away from the box/circle. The inputs specify the signals affecting subsystems, and the outputs designate the signals of interest or signals affecting other parts of the system [16].

All signals in FIG. 1 are functions of the wall-normal coordinate y , the spanwise wave-number k_z , and the temporal frequency ω , e.g. $v_2 = v_2(y, k_z, \omega)$, with homogeneous Dirichlet boundary conditions on ω_2 , and homogeneous Cauchy (both Dirichlet and Neumann) boundary conditions on v_2 . The bold symbols in FIG. 1 denote the Re -independent operators. These operators act in the wall-normal direction and some of them are parameterized by k_z ($\mathbf{F}_j$ and $\mathbf{G}_j$, $j = 1, 2, 3$), while the others depend on k_z , ω , β , and ϵ ($\mathbf{J}_1$, $\mathbf{J}_2$, and $\mathbf{C}_p$). The operators $\mathbf{F}_j$ and $\mathbf{G}_j$ are given by $\{\mathbf{F}_1 = ik_z, \mathbf{F}_2 = -k_z^2 \Delta^{-1}, \mathbf{F}_3 = -ik_z \Delta^{-1} \partial_y\}$, $\{\mathbf{G}_1 = -(i/k_z), \mathbf{G}_2 = \mathbf{I}, \mathbf{G}_3 = (i/k_z) \partial_y\}$, and they describe the way the forcing enters into the evolution model, and the way the velocity fluctuations depend on the wall-normal velocity and vorticity. The operator $\mathbf{C}_p$ captures the coupling from v_2 to ω_2 , and it is defined

as

$$\mathbf{C}_p = \mathbf{C}_{p1} + \mathbf{C}_{p2}/(\epsilon(1+i\omega)^2),$$

where $\mathbf{C}_{p1} = -ik_z U'(y)$ denotes the vortex tilting term, and $\mathbf{C}_{p2} = ik_z(1-\beta)\tilde{\mathbf{C}}_{p2}$, $\tilde{\mathbf{C}}_{p2} = U'(y)\mathbf{\Delta} + 2U''(y)\partial_y$, denotes the term arising due to the work done by the polymer stresses on the flow. Finally, $\mathbf{J}_1$ and $\mathbf{J}_2$ govern the internal dynamics of the wall-normal vorticity and velocity fluctuations, respectively. These two operators are given by $\mathbf{J}_j = (1+i\omega)\mathbf{K}_j$, where $\mathbf{K}_j = (\epsilon(i\omega)^2\mathbf{I} - (\beta\mathbf{T}_j - \epsilon\mathbf{I})i\omega - \mathbf{T}_j)^{-1}$. Here, $\mathbf{T}_1 = \mathbf{\Delta}$ and $\mathbf{T}_2 = \mathbf{\Delta}^{-1}\mathbf{\Delta}^2$, respectively, stand for the Squire and Orr-Sommerfeld operators in the streamwise-constant model of Newtonian fluids with $Re = 1$, $\mathbf{I}$ is the identity operator, $\mathbf{\Delta} = \partial_{yy} - k_z^2$ is a Laplacian with homogeneous Dirichlet boundary conditions, $\mathbf{\Delta}^{-1}$ is the inverse of the Laplacian, $\mathbf{\Delta}^2 = \partial_{yyy} - 2k_z^2\partial_{yy} + k_z^4$ with homogeneous Cauchy boundary conditions, $i = \sqrt{-1}$, $U(y) = y$ in Couette flow, $U(y) = 1 - y^2$ in Poiseuille flow, and $U'(y) = dU(y)/dy$.

The velocity and forcing components are related by $v_i = \mathbf{H}_{ij}d_j$, where $\mathbf{H}_{ij}$ denotes the ij th component of the frequency response operator $\mathbf{H}$, $\mathbf{v} = \mathbf{H}\mathbf{d}$. From FIG. 1, it is clear that the $\mathbf{H}_{ij}$ are determined by

$$\begin{aligned}\mathbf{H}_{11}(k_z, \omega; Re, \beta, \epsilon) &= \sqrt{Re} \bar{\mathbf{H}}_{11}(k_z, \omega; \beta, \epsilon), \\ \mathbf{H}_{1j}(k_z, \omega; Re, \beta, \epsilon) &= \sqrt{Re^3} \bar{\mathbf{H}}_{1j}(k_z, \omega; \beta, \epsilon), \quad j = 2, 3, \\ \mathbf{H}_{ij}(k_z, \omega; Re, \beta, \epsilon) &= \sqrt{Re} \bar{\mathbf{H}}_{ij}(k_z, \omega; \beta, \epsilon), \quad i, j = 2, 3, \\ \mathbf{H}_{i1}(k_z, \omega; Re, \beta, \epsilon) &= 0, \quad i = 2, 3,\end{aligned}$$

where the $\bar{\mathbf{H}}_{ij}$ represent the Re -independent operators, $\{\bar{\mathbf{H}}_{11} = \sqrt{\epsilon}\mathbf{G}_1\mathbf{J}_1\mathbf{F}_1; \bar{\mathbf{H}}_{1j} = \sqrt{\epsilon}\mathbf{G}_1\mathbf{J}_1\mathbf{C}_p\mathbf{J}_2\mathbf{F}_j, j = 2, 3; \bar{\mathbf{H}}_{ij} = \sqrt{\epsilon}\mathbf{G}_i\mathbf{J}_2\mathbf{F}_j, i, j = 2, 3\}$. The variance maintained in $\mathbf{v}$ is given by

$$E(k_z) = \frac{1}{2\pi} \int_{-\infty}^{\infty} \text{trace}(\mathbf{H}(k_z, \omega)\mathbf{H}^*(k_z, \omega)) d\omega,$$

where $\mathbf{H}^*$ is the adjoint of operator $\mathbf{H}$. (For notational brevity we have omitted the dependence on Re , β , and ϵ in the last expression.) Using the properties of the trace operator we have $E(k_z) = \sum_{i,j=1}^3 E_{ij}(k_z)$, where E_{ij} is the variance maintained in v_i by stochastically forcing the linearized model with d_j . From the definitions of E and operators $\mathbf{H}_{ij}$, the following Re -scaling of variance amplification is readily obtained

$$E(k_z; Re, \beta, \epsilon) = f(k_z; \beta, \epsilon)Re + g(k_z; \beta, \epsilon)Re^3,$$

where $f = f_{11} + f_{22} + f_{23} + f_{32} + f_{33}$, $g = g_{12} + g_{13}$, with $f_{ij}(k_z) = (1/2\pi) \int_{-\infty}^{\infty} \text{trace}(\bar{\mathbf{H}}_{ij}(k_z, \omega) \bar{\mathbf{H}}_{ij}^*(k_z, \omega)) d\omega$ and similarly for g_{1j} . This expression for the steady-state variance of $\mathbf{v}$ is valid for all Re , β , and ϵ . Our objective is to establish how the Re -independent functions f and g depend on ϵ in viscoelastic flows with $\epsilon = 1/\mu \ll 1$.

The Reynolds-number-independent contributions to the steady-state variance can be determined by recasting each $\bar{\mathbf{H}}_{ij}$ in the so-called state-space form

$$\begin{aligned}\dot{\mathbf{x}}_{ij}(y, k_z, t) &= \mathbf{A}_{ij}(k_z) \mathbf{x}_{ij}(y, k_z, t) + \mathbf{B}_j(k_z) d_j(y, k_z, t), \\ v_i(y, k_z, t) &= \mathbf{C}_i(k_z) \mathbf{x}_{ij}(y, k_z, t),\end{aligned}$$

where $\mathbf{x}_{ij}$ is a vector of state variables, and (d_j, v_i) is the input-output pair for frequency response operator $\bar{\mathbf{H}}_{ij}$. The state-space models contain a set of first order evolution equations (for state variables) and a static-in-time equation describing the relation between the states and the outputs. It is a standard fact [3] that the variance of v_i sustained by d_j is determined by $\text{trace}(\mathbf{C}_i \mathbf{P}_{ij} \mathbf{C}_i^*)$, where $\mathbf{P}_{ij}$ denotes the steady-state auto-correlation operator of $\mathbf{x}_{ij}$, which is found by solving the Lyapunov equation, $\mathbf{A}_{ij} \mathbf{P}_{ij} + \mathbf{P}_{ij} \mathbf{A}_{ij}^* = -\mathbf{B}_j \mathbf{B}_j^*$.

We now examine how functions f_{ij} depend on ϵ . The Re -independent operators $\{\bar{\mathbf{H}}_{11} = \sqrt{\epsilon} \mathbf{G}_1 \mathbf{J}_1 \mathbf{F}_1; \bar{\mathbf{H}}_{ij} = \sqrt{\epsilon} \mathbf{G}_i \mathbf{J}_2 \mathbf{F}_j, i, j = 2, 3\}$ admit the following evolution equations

$$\begin{aligned}\begin{bmatrix} \dot{x}_{ij} \\ \epsilon \dot{z}_{ij} \end{bmatrix} &= \begin{bmatrix} 0 & \mathbf{I} \\ \mathbf{T}_k & \beta \mathbf{T}_k - \epsilon \mathbf{I} \end{bmatrix} \begin{bmatrix} x_{ij} \\ z_{ij} \end{bmatrix} + \begin{bmatrix} 0 \\ \mathbf{F}_j \end{bmatrix} d_j, \\ v_i &= \sqrt{\epsilon} \begin{bmatrix} \mathbf{G}_i & \mathbf{G}_i \end{bmatrix} \begin{bmatrix} x_{ij} \\ z_{ij} \end{bmatrix},\end{aligned}\tag{1}$$

with $\{k = 1 \text{ for } i = 1; k = 2 \text{ for } i = 2, 3\}$, homogeneous Dirichlet boundary conditions on x_{11} and z_{11} , and homogeneous Cauchy boundary conditions on x_{ij} and z_{ij} for $i, j = 2, 3$. Eq. (1) is in the standard *singularly perturbed* form as the time-derivative of z_{ij} is multiplied by a small positive parameter ϵ [14]. The approximate solutions for x_{ij} and z_{ij} can be found by performing a slow-fast decomposition of the system's dynamics. By setting $\epsilon = 0$ in the z_{ij} -equation, we obtain $\bar{z}_{ij} = -(1/\beta) (\bar{x}_{ij} + \mathbf{T}_k^{-1} \mathbf{F}_j d_j)$, which is not a valid approximation of z_{ij} ; this is because of the white noise component d_j in $\bar{z}_{ij}$, which yields infinite variance of the difference between z_{ij} and $\bar{z}_{ij}$ irrespective of how small ϵ is. Nevertheless, $\bar{z}_{ij}$ can still be employed as an approximation of an input z_{ij} to the x_{ij} -subsystem as the slow system filters out the white noise component in $\bar{z}_{ij}$, while an approximation of the fast subsystem

is given by $\epsilon \dot{z}_{ij,f} = \beta \mathbf{T}_k z_{ij,f} + \mathbf{F}_j d_j$, with $z_{ij}(t) = z_{ij,f}(t) - (1/\beta)x_{ij,s}(t) + O(\epsilon^{1/2})$ [14]. Thus, the slow component of z_{ij} arises from a contribution of $\mathbf{T}_k x_{ij}$ and not from a contribution of the white noise input d_j , as would be common in singularly perturbed systems subject to slow inputs [14]. To summarize, the slow-fast decomposition of system (1) is given by

$$\begin{bmatrix} \dot{x}_{ij,s} \\ \dot{z}_{ij,f} \end{bmatrix} = \begin{bmatrix} \mathbf{A}_{ij,s} & 0 \\ 0 & \mathbf{A}_{ij,f} \end{bmatrix} \begin{bmatrix} x_{ij,s} \\ z_{ij,f} \end{bmatrix} + \begin{bmatrix} \mathbf{B}_{j,s} \\ \mathbf{B}_{j,f} \end{bmatrix} d_j,$$

$$v_i = \sqrt{\epsilon} \begin{bmatrix} \mathbf{C}_{i,s} & \mathbf{C}_{i,f} \end{bmatrix} \begin{bmatrix} x_{ij,s} \\ z_{ij,f} \end{bmatrix},$$

where $\mathbf{A}_{ij,s} = -(1/\beta)\mathbf{I}$, $\mathbf{B}_{j,s} = -(1/\beta)\mathbf{T}_k^{-1}\mathbf{F}_j$, $\mathbf{A}_{ij,f} = (\beta/\epsilon)\mathbf{T}_k$, $\mathbf{B}_{j,f} = (1/\epsilon)\mathbf{F}_j$, $\mathbf{C}_{i,s} = ((\beta - 1)/\beta) \mathbf{G}_i$, $\mathbf{C}_{i,f} = \mathbf{G}_i$. It is easy to show that the steady-state auto-correlation operator of $[x_{ij,s} \ z_{ij,f}]^T$ takes the form

$$\mathbf{P}_{ij} = \begin{bmatrix} \mathbf{X}_{ij} & \mathbf{Y}_{ij}^* \\ \mathbf{Y}_{ij} & (1/\epsilon)\mathbf{Z}_{ij} \end{bmatrix},$$

which yields $f_{ij} = \text{trace}(\mathbf{C}_{i,f}\mathbf{Z}_{ij}\mathbf{C}_{i,f}^*) + O(\epsilon)$, with $\mathbf{A}_{ij,f}\mathbf{Z}_{ij} + \mathbf{Z}_{ij}\mathbf{A}_{ij,f}^* = -\mathbf{B}_{j,f}\mathbf{B}_{j,f}^*$. A more formal procedure [14] can be used to show $f(k_z; \beta, \epsilon) = \hat{f}_0(k_z; \beta) + \sum_{k=1}^{\infty} \epsilon^k \hat{f}_k(k_z; \beta)$, $\epsilon \ll 1$, where $\hat{f}_0(k_z; \beta) = \sum_{i,j} \text{trace}(\mathbf{C}_{i,f}\mathbf{Z}_{ij}\mathbf{C}_{i,f}^*)$, $\{i, j = 2, 3; i = j = 1\}$.

Next, we examine the ϵ -dependence of terms responsible for the Re^3 -scaling of the steady-state variance. From the definition of operators $\mathbf{J}_1$, $\mathbf{J}_2$, and $\mathbf{C}_p$ it follows that $\bar{\mathbf{H}}_{1j} = (1/\sqrt{\epsilon})\mathbf{G}_1\mathbf{K}_1(\epsilon(1 + i\omega)^2\mathbf{C}_{p1} + \mathbf{C}_{p2})\mathbf{K}_2\mathbf{F}_j$, $j = 2, 3$. This yields an equivalent block diagram representation in FIG. 2 and leads to the following set of equations for $\bar{\mathbf{H}}_{1j}$, $j = 2, 3$,

$$\begin{aligned} \epsilon \ddot{\psi} &= \mathbf{T}_2 \psi + (\beta \mathbf{T}_2 - \epsilon \mathbf{I}) \dot{\psi} + \mathbf{F}_j d_j, \\ \epsilon \ddot{\phi} &= \mathbf{T}_1 \phi + (\beta \mathbf{T}_1 - \epsilon \mathbf{I}) \dot{\phi} + \varphi, \quad v_1 = \sqrt{1/\epsilon} \mathbf{G}_1 \phi, \\ \varphi &= \mathbf{C}_{p1}(\epsilon \ddot{\psi} + 2\epsilon \dot{\psi} + \epsilon \psi) + \mathbf{C}_{p2} \psi, \end{aligned}$$

with homogeneous Dirichlet boundary conditions on ϕ , and homogeneous Cauchy boundary conditions on ψ . By selecting $\mathbf{x} = [\psi \ \phi]^T$, $\mathbf{z} = [\dot{\psi} \ \dot{\phi}]^T$, we obtain a singularly perturbed form of $\bar{\mathbf{H}}_{1j}$

$$\begin{bmatrix} \dot{\mathbf{x}} \\ \epsilon \dot{\mathbf{z}} \end{bmatrix} = \begin{bmatrix} 0 & \mathbf{I} \\ \mathbf{A}_{21}(\epsilon) & \mathbf{A}_{22}(\epsilon) \end{bmatrix} \begin{bmatrix} \mathbf{x} \\ \mathbf{z} \end{bmatrix} + \begin{bmatrix} 0 \\ \mathbf{B}_2 \end{bmatrix} d_j,$$

$$v_1 = \sqrt{1/\epsilon} \begin{bmatrix} \mathbf{C}_1 & 0 \end{bmatrix} \begin{bmatrix} \mathbf{x} \\ \mathbf{z} \end{bmatrix}, \quad (2)$$

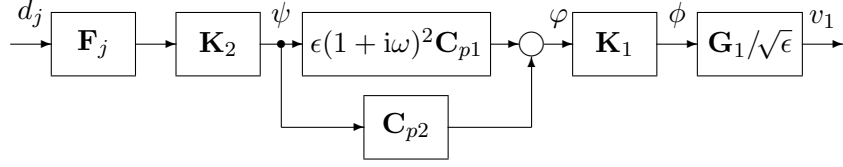


FIG. 2: Block diagram of $\bar{\mathbf{H}}_{1j}(k_z, \omega; \beta, \epsilon)$, $j = 2, 3$.

where all operators are partitioned conformably with the elements of $\mathbf{x}$ and $\mathbf{z}$,

$$\begin{aligned} \mathbf{A}_{21} &= \begin{bmatrix} \mathbf{T}_2 & 0 \\ \mathbf{C}_{p2} + \mathbf{C}_{p1}(\mathbf{T}_2 + \epsilon \mathbf{I}) & \mathbf{T}_1 \end{bmatrix}, \quad \mathbf{B}_2 = \begin{bmatrix} \mathbf{F}_j \\ \mathbf{C}_{p1} \mathbf{F}_j \end{bmatrix}, \\ \mathbf{A}_{22} &= \begin{bmatrix} \beta \mathbf{T}_2 - \epsilon \mathbf{I} & 0 \\ \mathbf{C}_{p1}(\beta \mathbf{T}_2 + \epsilon \mathbf{I}) & \beta \mathbf{T}_1 - \epsilon \mathbf{I} \end{bmatrix}, \quad \mathbf{C}_1 = \begin{bmatrix} 0 & \mathbf{G}_1 \end{bmatrix}. \end{aligned}$$

Since output v_1 in Eq. (2) does not depend on $\mathbf{z}$, we conclude that the fast dynamics does not influence evolution of v_1 . The approximate dynamics of the slow subsystem are given by $\{\dot{\mathbf{x}}_{1j,s} = \mathbf{A}_{1j,s} \mathbf{x}_{1j,s} + \mathbf{B}_{j,s} d_j, v_1 = \sqrt{1/\epsilon} \mathbf{C}_{1,s} \mathbf{x}_{1j,s}\}$, with $\mathbf{C}_{1,s} = [0 \ \mathbf{G}_1]$, $\mathbf{B}_{j,s} = -\mathbf{A}_{22}^{-1}(0) \mathbf{B}_2 = [- (1/\beta) \mathbf{T}_2^{-1} \mathbf{B}_j \ 0]^T$, and

$$\mathbf{A}_{1j,s} = -\mathbf{A}_{22}^{-1}(0) \mathbf{A}_{21}(0) = \frac{1}{\beta} \begin{bmatrix} -\mathbf{I} & 0 \\ -\mathbf{T}_1^{-1} \mathbf{C}_{p2} & -\mathbf{I} \end{bmatrix}.$$

Thus, we have $g_{1j} = (1/\epsilon) \text{trace}(\mathbf{C}_{1,s} P_{1j} \mathbf{C}_{1,s}^*) + O(1)$, where P_{1j} denotes the auto-correlation operator of $\mathbf{x}_{1j,s}$, $\mathbf{A}_{1j,s} \mathbf{P}_{1j} + \mathbf{P}_{1j} \mathbf{A}_{1j,s}^* = -\mathbf{B}_{j,s} \mathbf{B}_{j,s}^*$. In fact, it can be shown that $g(k_z; \beta, \epsilon) = (1/\epsilon) \sum_{k=0}^{\infty} \epsilon^k \hat{g}_k(k_z; \beta)$, $\epsilon \ll 1$, where $\hat{g}_0(k_z; \beta) = \sum_{j=2}^3 \text{trace}(\mathbf{C}_{1,s} \mathbf{P}_{1j} \mathbf{C}_{1,s}^*)$.

To recap, in streamwise-constant Poiseuille and Couette flows of Oldroyd-B fluids with $\mu \gg 1$, the level of variance maintained in $\mathbf{v}$ is given by

$$E(k_z; Re, \beta, \mu) = \sum_{k=0}^{\infty} \frac{Re}{\mu^k} \left(\hat{f}_k(k_z; \beta) + \mu Re^2 \hat{g}_k(k_z; \beta) \right),$$

where $\hat{f}_k$ and $\hat{g}_k$ are functions independent of Re and μ . Therefore, for sufficiently large μ , $E(k_z; Re, \beta, \mu) \approx Re \hat{f}_0(k_z; \beta) + \mu Re^3 \hat{g}_0(k_z; \beta)$, which implies that in elasticity-dominated flows, the terms responsible for the Re - and Re^3 -scaling of the steady-state variance are, respectively, μ -independent and linearly dependent on μ .

It is readily shown that $\hat{f}_0(k_z; \beta) = \tilde{f}_0(k_z)/\beta$, where the base-flow-independent function $\tilde{f}_0(k_z)$ is given by $\tilde{f}_0(k_z) = -0.5(\text{trace}(\mathbf{T}_1^{-1}) + \text{trace}(\mathbf{T}_2^{-1}))$. Moreover, $\hat{g}_0(k_z; \beta) = \tilde{g}_0(k_z)(1 -$

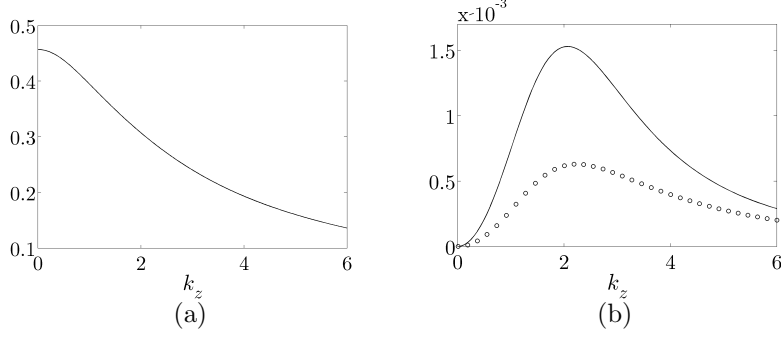


FIG. 3: Plots of $\tilde{f}_0(k_z)$ (a) and $\tilde{g}_0(k_z)$ (b); $\tilde{g}_0(k_z)$ in both Couette (solid curve) and Poiseuille (circles) flows is shown.

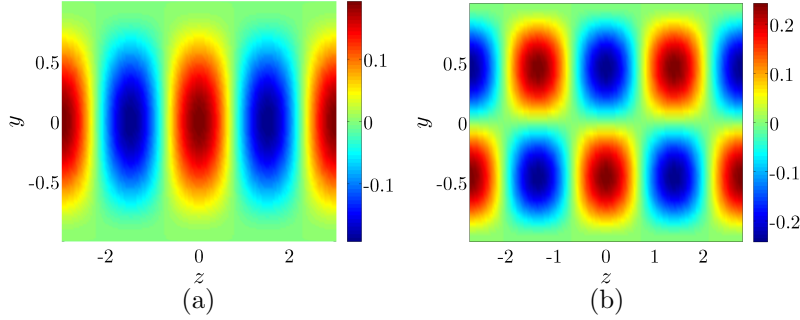


FIG. 4: (color online) Streamwise velocity fluctuations $v_1(z, y)$ containing most variance in Couette (a) and Poiseuille (b) flows.

$\beta)^2/\beta$, with $\tilde{g}_0(k_z) = (k_z^2/4) \text{trace}(\mathbf{T}_1^{-1} \tilde{\mathbf{C}}_{p2} \mathbf{T}_2^{-2} \tilde{\mathbf{C}}_{p2}^* \mathbf{T}_1^{-1})$. Thus, for $\mu \gg 1$,

$$E(k_z; Re, \beta, \mu) \approx \frac{Re}{\beta} \left(\tilde{f}_0(k_z) + \mu Re^2 (1 - \beta)^2 \tilde{g}_0(k_z) \right),$$

which shows that the variance depends affinely on μ and increases monotonically with a decrease in the ratio of the solvent viscosity to the total viscosity.

The analytical expressions for $\text{trace}(\mathbf{T}_j^{-1})$, $j = 1, 2$, were derived in [15]; these can be used to obtain a formula for $\tilde{f}_0(k_z) = f_N(k_z)$, which is illustrated in FIG. 3(a). In Couette flow, the expression for $\tilde{g}_0(k_z)$ simplifies to $-(k_z^2/4) \text{trace}(\mathbf{T}_2^{-2} \mathbf{T}_1^{-1})$, and an explicit k_z -dependence of $\tilde{g}_0$ can be derived after some manipulation. The resulting formula for $\tilde{g}_0(k_z)$ is used to generate the plot in FIG. 3(b); from this plot we observe the non-monotonic character of $\tilde{g}_0(k_z)$, with peak values at $k_z \approx 2.07$ (in Couette flow) and $k_z \approx 2.24$ (in Poiseuille flow). Streamwise velocity flow structures that contain the most variance in respective flows with

these two spanwise wavenumbers are shown in FIG. 4. The most amplified sets of fluctuations are given by high (hot colors) and low (cold colors) speed streaks. In Couette flow the streaks occupy the entire channel width, and in Poiseuille flow they are antisymmetric with respect to the channel's centerline. These flow structures have striking resemblance to the initial conditions responsible for the largest transient growth in Newtonian fluids [2]. Despite similarities, the fluctuations shown in FIG. 4 and in Ref. [2] arise due to fundamentally different physical mechanisms: in high Re -flows of Newtonian fluids, vortex tilting is the main driving force for amplification; in high μ /low Re -flows of viscoelastic fluids, it is the energy exchange mechanism mentioned earlier [13].

In summary, a new mechanism for nonmodal amplification of disturbances in elasticity-dominated flows is revealed using variance amplification analysis of the linearized streamwise-constant model. This mechanism can serve as an initial stage of streak development which may—upon reaching a finite amplitude—undergo secondary amplification and/or instability and eventually lead to an ‘elastic turbulence’ [9, 10]. Elastic turbulence may find use in promoting mixing in microfluidic devices, where inertial effects are weak due to the small geometries [11].

* Electronic address: mihailo@umn.edu

† Electronic address: kumar@cems.umn.edu

- [1] L. N. Trefethen, A. E. Trefethen, S. C. Reddy, and T. A. Driscoll, *Science* **261**, 578 (1993).
- [2] K. M. Butler and B. F. Farrell, *Phys. Fluids A* **4**, 1637 (1992).
- [3] B. F. Farrell and P. J. Ioannou, *Phys. Fluids A* **5**, 2600 (1993).
- [4] B. F. Farrell and P. J. Ioannou, *Phys. Rev. Lett.* **72**, 1188 (1994).
- [5] S. Grossmann, *Rev. Mod. Phys.* **72**, 603 (2000).
- [6] P. J. Schmid, *Annu. Rev. Fluid Mech.* **39**, 129 (2007).
- [7] M. Matsubara and P. H. Alfredsson, *J. Fluid Mech.* **430**, 149 (2001).
- [8] R. G. Larson, *Rheol. Acta* **31**, 213 (1992).
- [9] R. G. Larson, *Nature* **405**, 27 (2000).
- [10] A. Groisman and V. Steinberg, *Nature* **405**, 53 (2000).
- [11] A. Groisman and V. Steinberg, *Nature* **410**, 905 (2001).
- [12] N. Hoda, M. R. Jovanović, and S. Kumar, *J. Fluid. Mech.* **601**, 407 (2008).

- [13] N. Hoda, M. R. Jovanović, and S. Kumar, J. Fluid. Mech. (2008), submitted.
- [14] P. Kokotović, H. K. Khalil, and J. O'Reilly, *Singular perturbation methods in control: analysis and design* (SIAM, Philadelphia, 1999).
- [15] B. Bamieh and M. Dahleh, Phys. Fluids **13**, 3258 (2001).
- [16] K. J. Åström and R. M. Murray, *Feedback systems: an introduction for scientists and engineers* (Princeton University Press, Princeton, 2008).